



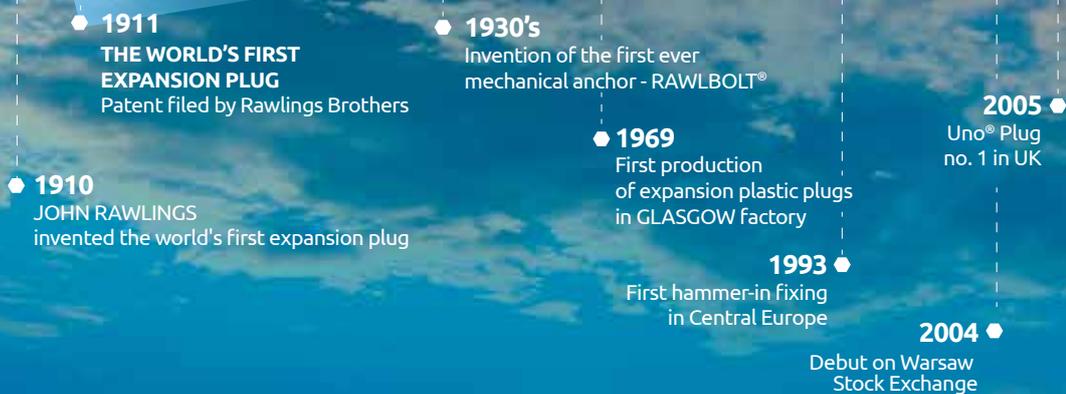


**RAWLPLUG<sup>®</sup>**

Direct Fastening Systems

**Trust & Innovation**

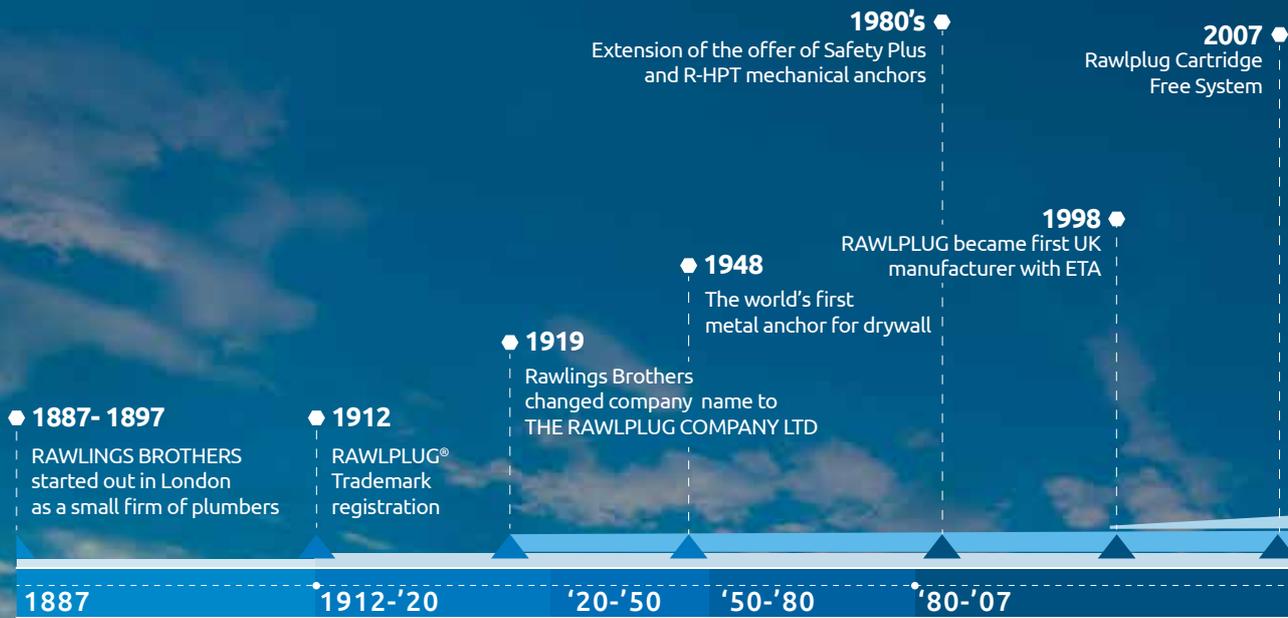

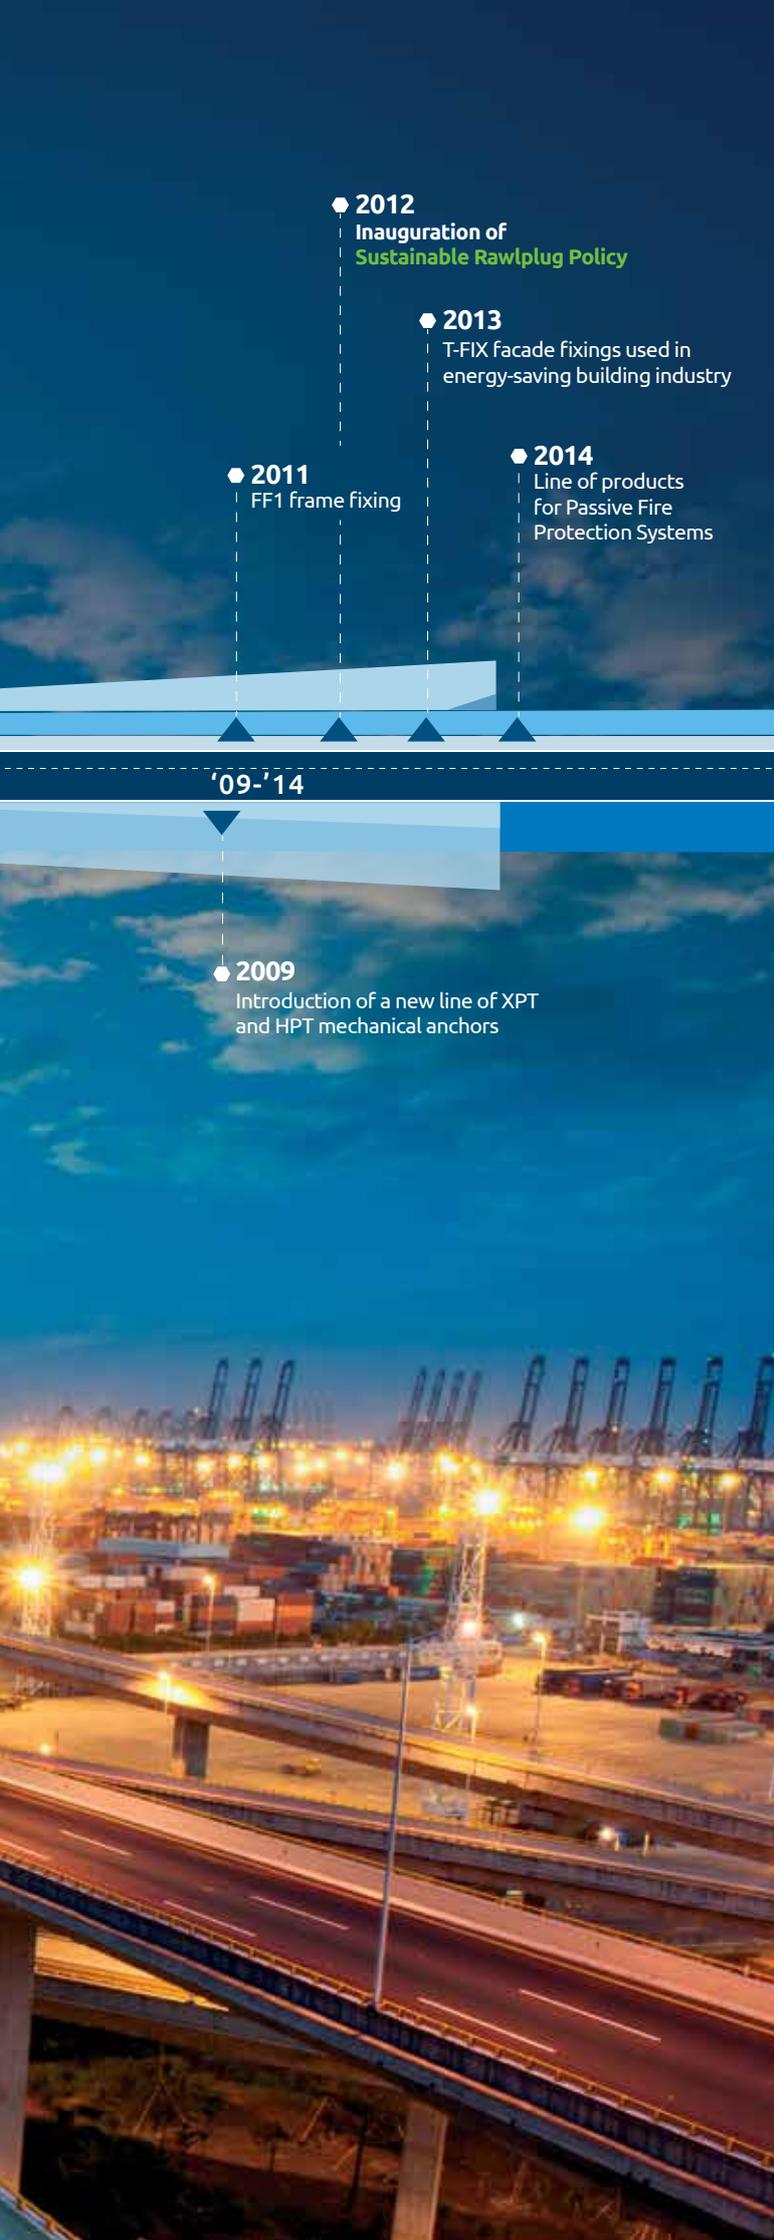

● **2012**  
Inauguration of  
Sustainable Rawlplug Policy

● **2013**  
T-FIX facade fixings used in  
energy-saving building industry

● **2014**  
Line of products  
for Passive Fire  
Protection Systems

● **2011**  
FF1 frame fixing

'09-'14

● **2009**  
Introduction of a new line of XPT  
and HPT mechanical anchors

- Since 1911, when John Rawlings invented and filed an application to patent the world's first wall plug, the history of fixings has been inextricably linked with the RAWLPLUG® brand. Following the tremendous success of this revolutionary product in Europe, the RAWLPLUG company was founded in 1919 and quickly became renowned across the world for its innovative and reliable fixings.

Over the years, a small family company became an international organisation whose power is reflected in **13 companies** on four continents, over **1.900 employees** and almost **30.000 lines**, making up our diverse range of products. The Group's present-day know-how is a synergy of knowledge and experience based on the best practices of its subsidiaries whose main activity is developing innovative solutions in the field of fixing technologies, including their **design, production and distribution**.

Since it was founded, Rawlplug has placed great emphasis on the **quality and innovation** of its products, developing research centres in Glasgow, Wrocław and Lancut. R&D teams consisting of experienced engineers, in the quest to find innovative solutions, design products intended for a wide range of substrates and applications. Pioneering Rawlplug solutions, imitated all over the world, have been defining the direction for the entire fixings industry for over 100 years.

- Nowadays Rawlplug's® products are used in construction, automotive, machine and electro-machine, mining, shipyard, road, timber and power industries, including around 30.000 product listings divided into 3 key groups:

#### Fixings & Anchors

Thermal insulation fixings for facades and roofs, self-drilling screws, lightweight & domestic fixings, frame fixings, medium & heavy-duty anchors, resin-bonded anchors and many others.

#### Fasteners

DIN bolts, nuts & washers, special bolts and many others (including bespoke solutions).

#### Tools

Hand & power tools, power tool accessories (drills, saws, chisels, etc.) and direct fastening systems.

Today Rawlplug continues in its fine tradition of innovation through constant research and development of technologies and processes that minimise the company's impact on the natural environment, making sustainable development one of the pillars of its existence.

### Sustainable Rawlplug:

- employs a strategy of successful management and ethical business practices;
- builds long-lasting relationships based on common respect and trust with customers, suppliers and business partners thanks to an effectively designed and operated supply chain;
- cares for its employees and provides help and support to develop local communities;
- is concerned for the natural environment, focusing on areas involving production processes, employee education and cooperation with experts in the field of waste management.

Thanks to its constant emphasis on innovative solutions and customer care together with keen concern over sustainable development and environmental issues, RAWLPLUG'S® products continue to be acknowledged around the globe making them a world-class, first choice for the fixings industry.

Sustainable **RAWLPLUG**



## Contents

<b>GAS POWERED NAILER FOR TIMBER</b>	<b>TÜV certified</b>	<b>CE</b>	<b>7</b>
<b>GAS POWERED BRAD NAILER - STRAIGHT</b>	<b>TÜV certified</b>	<b>CE</b>	<b>8</b>
<b>GAS POWERED BRAD NAILER - ANGLED</b>	<b>TÜV certified</b>	<b>CE</b>	<b>8</b>
<b>GAS POWERED METAL CONECTOR NAILER</b>		<b>CE</b>	<b>9</b>
<b>GAS POWERED NAILER FOR STEEL AND CONCRETE</b>		<b>CE</b>	<b>9</b>
<b>PNEUMATIC NAILERS FOR WOOD</b>		<b>CE</b>	<b>11</b>
<b>PNEUMATIC STEEL AND CONCRETE NAILER</b>		<b>CE</b>	<b>15</b>
<b>OIL LUBRICATED COMPRESSOR</b>		<b>CE</b>	<b>17</b>
<b>OIL LESS COMPRESSOR</b>		<b>CE</b>	<b>18</b>
<b>HOSE REEL</b>		<b>CE</b>	<b>18</b>
<b>PAPER COLLATED NAILS FOR TIMBER</b>		<b>CE</b>	<b>20</b>
<b>FUEL CELLS</b>		<b>CE</b>	<b>22</b>
<b>BRAD NAILS</b>		<b>CE</b>	<b>22</b>
<b>PLASTIC COLLATED PINS FOR STEEL AND CONCRETE</b>		<b>CE</b>	<b>23</b>
<b>PAPER COLLATED NAILS FOR TIMBER</b>		<b>CE</b>	<b>24</b>
<b>PAPER COLLATED METAL CONECTOR NAILS</b>		<b>CE</b>	<b>24</b>
<b>PLASTIC COLLATED NAILS FOR TIMBER</b>		<b>CE</b>	<b>25</b>
<b>WIRE COLLATED NAILS FOR TIMBER</b>		<b>CE</b>	<b>25</b>
<b>HEAVY DUTY HAMMER TACKER</b>		<b>CE</b>	<b>27</b>
<b>PROFESSIONAL HAND STAPLER</b>		<b>CE</b>	<b>27</b>
<b>REBAR TYING</b>		<b>CE</b>	<b>29</b>
<b>POS PACKAGES</b>		<b>CE</b>	<b>30</b>

# RAWLPLUG GAS POWERED TOOLS

IF YOU HAVE A REQUIREMENT FOR FIXING TIMBER TO TIMBER, RAWLPLUG HAS A RANGE OF PROFESSIONAL TOOLS FOR THE JOB.




The WW90CH is a gas powered framing nailer for using clipped head nails. The tool will function with plain or ring shank nails ranging from 50 to 90 mm in length. It has a magazine capacity of 60 nails and features a quick loading mechanism and clip to prevent nails from dropping out when reloading.

A precision secure fixing is established by using the key less depth adjuster. For second fix applications such as tongue and groove panelling, beading and architraves, Rawlplug have the option of a straight or angled magazine gas powered tool. The A2064 is an angled brad nailer that functions with a 32 to 64 mm nail, whilst the B1664 is a straight brad nailer with a range from a 19 to 64 mm. Both version of brad nails are a size 16 gauge. The tools share the same power unit and key less depth of drive adjustment. The magazine has a capacity of 100 brad nails and features a quick release mechanism for clearing any obstructions. A new addition to the Rawlplug portfolio is a gas powered positive placement nailer. The GMC38 will function with a nail range of 35 to 60 mm. The tool is capable of using both paper or plastic collated nails with a full round head.

## Gas powered nailer for timber

### Features and benefits

TÜV certified

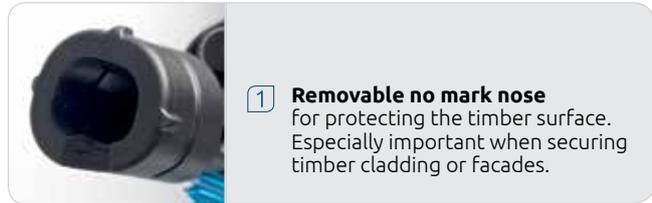

**1 Removable no mark nose**  
for protecting the timber surface. Especially important when securing timber cladding or facades.



**2 Key less depth adjustment**  
The operator can easily adjust the depth that the fixing is driven into the timber to produce a precise and secure fixing.



**3 Retractable rafter hook**  
ensures safe storage of the tool when not in use. Can also be hung from a tool belt for complete maneuverability.



**4 Metal magazine**  
Quick and simple to load due to the one handed operational feeder spring. A safety clip at the rear prevents the nails from falling out and ensures safe reloading



**R-KIT-WW90/SC40**  
Gas tools cleaning kit - debre cleaner, lubricating oil, spare air filter and o-ring, cloth and instruction of cleaning procedure. The kit is not included with the tool.

### Applications

Timber frame stud work  
Roof battens  
Cladding and panelling  
Floor boarding  
Fencing  
Decking

### Associated products

R-DPG paper collated nails  
R-DPGH paper collated nails  
R-DPHDG paper collated nails  
R-DPK paper collated nails  
R-DRBH paper collated nails  
R-DRG paper collated nails  
R-DRGH paper collated nails  
R-DRHDG paper collated nails  
R-DRK paper collated nails  
R-DRS paper collated nails

## Technical Data

Product Code	Fastener Range [mm]	Fastener Type	Dimensions [mm]	Fuel Cell Type	Weight [kg]	Magazine Capacity	Battery Charge	Shots per charge	Noise Level [dB]	EAN
R-RAWL-WW90CH	50 - 90	Clipped head nail	376 x 371 x 108	GP1	3.4	60	2 hours	4000	94	5906675222240
R-KIT-WW90/SC40	-	-	-	-	-	-	-	-	-	5906675096964

## Gas powered Brad nailer - Straight

### Features and benefits



TÜV certified



#### Applications

Tongue and groove panelling  
Dado rail  
Skirting boards  
Beading  
Architraves

#### Associated products

Straight brad nails  
R-RAWL-GP4-2BL



**1 Quick release mechanism**  
for clearing obstructions without the use of tools. Also allows for simple maintenance.



**2 Removable no mark nose**  
for protecting the timber surface. Extremely important during all second fix applications in which undamaged elements will be visible. A spare nose is stored on the magazine.



**3 Belt hook for safe storage**  
In addition the low weight of the tool allows good maneuverability and transportation in the workplace.

Product Code	Fastener Range [mm]	Fastener Type	Dimensions [mm]	Fuel Cell Type	Weight [kg]	Magazine Capacity	Battery Charge	Shots per charge	Noise Level [dB]	EAN
R-RAWL-B1664	19 - 64	16 gauge straight brad	320 x 279 x 85	GP4	2.15	100	2 hours	4500	92	5906675267654

## Gas powered Brad nailer - Angled

### Features and benefits



TÜV certified



#### Applications

Tongue and groove panelling  
Dado rail  
Skirting boards  
Beading  
Architraves

#### Associated products

Angled brad nails  
R-RAWL-GP4-2BL



**1 Quick release mechanism**  
for clearing obstructions without the use of tools. Also allows for simple maintenance.



**2 Removable no mark nose**  
for protecting the timber surface. Extremely important during all second fix applications in which undamaged elements will be visible. A spare nose is stored on the magazine.



**3 Belt hook for safe storage**  
In addition the low weight of the tool allows good maneuverability and transportation in the workplace.




**4 Angled magazine**  
is a feature when working in tight corners. It allows to reach comfortably all application areas.

Product Code	Fastener Range [mm]	Fastener Type	Dimensions [mm]	Fuel Cell Type	Weight [kg]	Magazine Capacity	Battery Charge	Shots per charge	Noise Level [dB]	EAN
R-RAWL-A2064	32 - 64	16 gauge angled brad	320 x 279 x 85	GP4	2.15	100	2 hours	4500	92	5906675280011

## Gas powered metal connector nailer

### Features and benefits



#### Applications

Connector plates  
Joist hangers  
Strapping  
Z clips  
Sole brackets  
Truss metalwork

#### Associated products

R-RAWL-GP1  
R-DPCG-3838  
R-HDGT-3838

- 

**1 Key less depth adjustment**  
The operator can easily adjust the depth that the fixing is driven into the timber to produce a precise and secure fixing of the metal connector.
- 

**2 Retractable rafter hook**  
ensures safe storage of the tool when not in use. Can also be hung from a tool belt for complete maneuverability.
- 

**3 Quick and simple**  
to load the magazine due to the one handed operational feeder spring. Ensures safe reloading.
- 

**4 Nose with probe mechanism**  
tip locates in the pre drilled hole for a precise and quick fixing. Operational even in areas with limited access.

Product Code	Fastener Range [mm]	Fastener Type	Dimensions [mm]	Fuel Cell Type	Weight [kg]	Magazine Capacity	Battery Charge	Shots per charge	Noise Level [dB]	EAN
R-RAWL-GMC38	35 - 60	round head nail	376 x 371 x 108	GP1	3.4	24/30	2 hours	4000	94	50104450075552

## Gas powered nailer for steel and concrete

### Features and benefits



#### Applications

Cable clamps  
Cable conduits and wires  
Cable trays  
Drywall structures

#### Associated products

R-KNC plastic collated concrete pins  
R-KSC plastic collated steel pins  
R-RAWL-GP2

- 

**1 Removable magnetic nose tip**  
for attaching metal clips and ceiling hangers. User can safely and comfortably perform all overhead installations.
- 

**2 Key less depth adjustment**  
The operator can easily adjust the depth that the fixing is driven into the steel or concrete to produce a precise and secure fixing.
- 

**3 The rubber cover**  
stops dust and dirt from entering the tool while operating on over head applications.
- 

**4 Quick releasing mechanism**  
Providing easy access to the magazine for removing obstructions and performing routine maintenance.

Product Code	Fastener Range [mm]	Fastener Type	Dimensions [mm]	Fuel Cell Type	Weight [kg]	Magazine Capacity	Battery Charge	Shots per charge	Noise Level [dB]	EAN
R-RAWL-SC40	15 - 40	Full head pin	376 x 420 x 108	GP2	3.5	40	2 hours	4000	92	5906675271798



# PNEUMATIC TOOLS

COIL NAILERS, STRIP NAILERS, ROOFING NAILER, POSITIVE PLACEMENT NAILER, STEEL AND CONCRETE NAILER



The wide range of Rawlplug pneumatic nailer's have been designed and manufactured to the highest standards. We are constantly focused on delivering performance tools that can be used in the construction industry. All of our tools are CE certified.

## Pneumatic nailers for timber

### Features and benefits



- ✓ **Adjustable exhaust port** An important safety feature when operating in areas where other persons may be affected by the exhausted air and particles
- ✓ **Key less depth adjustment** the operator can easily alter the depth that the fixing is driven into the timber to produce a precise and secure fixing.
- ✓ **Removable no mark nose** for protecting the timber surface. Especially important when securing timber cladding or facades.
- ✓ **Up to 10% more powerful than gas equivalent.** Power ensures outstanding performance in all applications and timber types.
- ✓ **Magazine capacity of 88 nails** reducing the frequency for reloading thus increasing performance and speed of operation.
- ✓ **Simplicity of tool design** ensures low maintenance and high reliability.

#### Applications

Timber frame stud work  
Roof battens  
Cladding and panelling  
Floor boarding  
Fencing  
Decking

#### Associated products

SPG-DPK paper collated nails  
SPG-DRG paper collated nails  
SPG-DRK paper collated nails  
SPG-DPG paper collated nails  
R-RAWL-C50  
R-RAWL-C24

### Technical Data

Product Code	Dimensions [mm]	Fastener type	Magazine capacity	Magazine Angle	Fastener Diameter range [mm]	Fastener-range [mm]	Weight [kg]	Noise level [dB]	Operating pressure [bar]	EAN
R-RAWL-PN-3490	420 x 125 x 370	D-head nail	88 nails	34 degree	2.8 - 4.1	50 - 90	3.8	94	5-7	5906675252049

## Pneumatic nailers for timber

### Features and benefits



- ✓ **Adjustable exhaust port** an important safety feature when operating in areas where other persons may be affected by the exhausted air and particles
- ✓ **Key less depth adjustment** the operator can easily adjust the depth that the fixing is driven into the timber to produce a precise and secure fixing.
- ✓ **Removable no mark nose** for protecting the timber surface. Especially important when securing timber cladding or facades.
- ✓ **Magazine capacity 50 nails**
- ✓ **Simplicity of tool design** ensures low maintenance and high reliability.

#### Applications

Timber frame stud work  
Roof battens  
Decking

#### Associated products

R-GPG plastic collated nails  
R-RAWL-C50  
R-RAWL-C24

### Technical Data

Product Code	Dimensions [mm]	Fastener type	Magazine capacity	Magazine Angle	Fastener Diameter range [mm]	Fastener-range [mm]	Weight [kg]	Noise level [dB]	Operating pressure [bar]	EAN
R-RAWL-PNP-130	473 x 149 x 354	Full head nail	50 nails	21 degree	3.3 - 4.2	90 - 130	5.6	94	7-8	5906675251981

## Pneumatic metal connector nailer for timber

### Features and benefits



- ✓ **Nose with probe mechanism** tip locates in the pre drilled hole for a precise and quick fixing. Operational even in areas with limited access.
- ✓ **Extremely lightweight** and maneuverable which is an advantage when operating in areas with limited access.
- ✓ **Reduced risk of hand injury**
- ✓ **Magazine capacity 29 nails**
- ✓ **Rotary air connector** provides 360 degree maneuverability

#### Applications

Fixing metal wood connectors  
Strapping  
Truss plates

#### Associated products


R-HDGT twist nails  
R-DPCG paper collated nails  
R-RAWL-C24  
R-RAWL-C50

### Technical Data

Product Code	Dimensions [mm]	Fastener type	Magazine capacity	Magazine Angle	Fastener Diameter range [mm]	Fastener range [mm]	Weight [kg]	Noise level [dB]	Operating pressure [bar]	EAN
R-RAWL-PMC-38	295 x 90 x 385	Full head nail	29 nails	34 degree	3.3 - 4.1	38	2.5	94	5-7	5906675251998

## Pneumatic roofing nailer for timber

### Features and benefits



- ✓ **Key less depth adjustment**  
The operator can easily adjust the depth that the fixing is driven into the timber to produce a precise and secure fixing.
- ✓ **Very low recoil value** provides great improvement in operators comfort of using the tool.
- ✓ **Ergonomic design** and balance improves the comfort for the operator and reduces the risk of injury.
- ✓ **Lightweight and maneuverable**  
safe and ideal for roofing applications
- ✓ **Nail cover ensures** great level of safety while operating this type of tool. All moving nails are separated from involuntary access.
- ✓ **Guide plate** to ensure that the fixing is 90 degrees to the application.

#### Applications

Felt roofing  
Fixing breather membranes

#### Associated products

R-RAWL-C50  
R-RAWL-C24

### Technical Data

Product Code	Dimensions [mm]	Fastener type	Magazine capacity	Magazine Angle	Fastener Diameter range [mm]	Fastener range [mm]	Weight [kg]	Noise level [dB]	Operating pressure [bar]	EAN
R-RAWL-PRN-45	283 x 118 x 269	Full head nail	120 nails	16 degree	3.05	22 - 45	2.6	95	5-7	5906675097466

## Pneumatic coil nailer for timber

### Features and benefits



- ✓ **Adjustable exhaust port**  
An important safety feature when operating in areas where other persons may be affected by the exhausted air and particles
- ✓ **Ergonomic design** and balance improves the comfort for the operator and reduces the risk of injury.
- ✓ **Nail cover ensures** great level of safety while operating this type of tool. All moving nails are separated from unvoluntary access.
- ✓ **Low recoil** value ensures comfort for the operator.
- ✓ **Magazine capacity up to 400 nails**

#### Applications

Fencing  
Decking  
Cladding and panelling  
Wooden pallets and packaging

#### Associated products

R-GDP wire collated nails  
R-RAWL-C50  
R-RAWL-C24  
R-RAWL-C6

### Technical Data

Product Code	Dimensions [mm]	Fastener type	Magazine capacity	Magazine Angle	Fastener Diameter range [mm]	Fastener range [mm]	Weight [kg]	Noise level [dB]	Operating pressure [bar]	EAN
R-RAWL-PN-57	285 x 135 x 285	Full head nail	300 - 400 nails	16 degree	2.1 - 2.3	25 - 57	2.5	94	5-7	5906675252124

## Pneumatic coil nailer for timber

### Features and benefits



- ✓ **Adjustable exhaust port** an important safety feature when operating in areas where other persons may be affected by the exhausted air and particles
- ✓ **Ergonomic design** and balance improves the comfort for the operator and reduces the risk of injury.
- ✓ **Nail cover ensures** great level of safety while operating this type of tool. All moving nails are separated from unvoluntary access.
- ✓ **Low recoil** value ensures comfort for the operator.
- ✓ **Magazine capacity up to 300 nails**

#### Applications

Fencing  
Decking  
Cladding and panelling  
Wooden pallets and packaging

#### Associated products

R-GDP wire collated nails  
R-RAWL-C24  
R-RAWL-C50  
R-RAWL-C6

### Technical Data

Product Code	Dimensions [mm]	Fastener type	Magazine capacity	Magazine Angle	Fastener Diameter range [mm]	Fastener range [mm]	Weight [kg]	Noise level [dB]	Operating pressure [bar]	EAN
R-RAWL-PN-70	318 x 125 x 320	Full head nail	225 - 300 nails	16 degree	2.5 - 2.9	45 - 70	3.6	99	5-7	5906675252148

## Pneumatic coil nailer for timber

### Features and benefits



- ✓ **Adjustable exhaust port** an important safety feature when operating in areas where other persons may be affected by the exhausted air and particles
- ✓ **Ergonomic design** and balance improves the comfort for the operator and reduces the risk of injury.
- ✓ **Nail cover ensures great** level of safety while operating this type of tool. All moving nails are separated from unvoluntary access.
- ✓ **Low recoil** value ensures comfort for the operator.

#### Applications

Fencing  
Decking  
Cladding and panelling  
Wooden pallets and packaging

#### Associated products

R-GDP wire collated nails  
R-RAWL-C50  
R-RAWL-C24

## Technical Data

Product Code	Dimensions [mm]	Fastener type	Magazine capacity	Magazine Angle	Fastener Diameter range [mm]	Fastener range [mm]	Weight [kg]	Noise level [dB]	Operating pressure [bar]	EAN
R-RAWL-PN-83	349 x 129 x 313	Full head nail	225 - 300 nails	16 degree	2.5 - 3.3	50 - 83	3.7	101	5-7	5906675252162

## Pneumatic coil nailer for timber

### Features and benefits



- ✓ **Ergonomic design** and balance improves the comfort for the operator and reduces the risk of injury.
- ✓ **Nail cover ensures** great level of safety while operating this type of tool. All moving nails are separated from unvoluntary access.
- ✓ **Low recoil** value ensures comfort for the operator.

#### Applications

Wooden pallets and packaging  
Cladding and panelling  
Decking  
Fencing

#### Associated products

R-GDP wire collated nails  
R-RAWL-C24  
R-RAWL-C50

## Technical Data

Product Code	Dimensions [mm]	Fastener type	Magazine capacity	Magazine Angle	Fastener Diameter range [mm]	Fastener range [mm]	Weight [kg]	Noise level [dB]	Operating pressure [bar]	EAN
R-RAWL-PN-90	350 x 130 x 360	Full head nail	225 - 300 nails	16 degree	2.5 - 3.3	50 - 90	4.32	95	5-7	5906675097459

## Pneumatic steel and concrete nailer

### Features and benefits




✓ **Key less depth adjustment**  
The operator can easily adjust the depth that the fixing is driven into the steel and concrete to produce a precise and secure fixing.



✓ **Quick release mechanism**  
for clearing obstructions without the use of tools. Also allows for simple maintenance.



✓ **Magazine capacity**  
40 pins

✓ **Up to 10% more powerful**  
than gas equivalent. Power ensures outstanding performance in all applications and base material types.

✓ **Special heat treated driver blade** provides longer life.

### Applications

Cable clamps  
Cable conduits and wires  
Cable trays  
Drywall structures

R-GDP wire collated nails  
R-RAWL-C50  
R-RAWL-C24

## Technical Data

Product Code	Dimensions [mm]	Fastener type	Magazine capacity	Magazine Angle	Fastener Diameter range [mm]	Fastener range [mm]	Weight [kg]	Noise level [dB]	Operating pressure [bar]	EAN
R-RAWL-PSC40	437 x 120 x 320	Full head nail	42 nails	0 degree	2.6 - 3.0	15 - 40	3.4	87	5-7	5906675062587



## RAWLPLUG COMPRESSORS



The Rawlplug compressor range was meticulously developed to align with our pneumatic tools.

Our compressors are designed for both DIY and semi-professional use. All models benefit from easy-start motors, simple to adjust regulators, quick-release air coupling and readily accessible drain valves.

Using the highest quality parts in the manufacture of each unit ensures our equipment is powerful, compact and extremely reliable and efficient

## Oil lubricated compressor

### Features and benefits



- 1 **Brush less motor ensures great performance and durability.** Brush less technology is the most reliable drive type used in power tools and mobile equipment providing low damage risk and maintenance cost.
- 2 **Oil lubricated pump ensures faultless** operation and great heat distribution. Thanks to this technology the device is one of the most reliable on the marketplace.
- 3 **Fully automatic on/off control switch for best performance.** It secures stability of parameters especially important when operating tools that are sensitive to changes of pressure.
- 4 **Intake filter built in to protect damage** that can be caused during transportation and storage. This special design prevents this type of damage and reduces service cost.
- 5 **Robust wheels and double front foot** for good stability. Both features ensure solid working position of the device and prevent from tipping over.

#### Associated products

R-RAWL-PN-3490 R-RAWL-PN-70  
 R-RAWL-PSC40 R-RAWL-PN-83  
 R-RAWL-PMC-38 R-RAWL-PNP-130  
 R-RAWL-PN-57 R-RAWL-PN-90  
 R-RAWL-PRN-45

### Technical Data

Product Code	Description	Tank size [l]	Lubrication	Power [HP]	Air Output [l/min]	Noise Level [dB]	Weight [kg]	EAN
R-RAWL-C24	air compressor	24	Oil lubricated	2.25	200	95	25	5906675057736

## Oil lubricated compressor

### Features and benefits



- 1 **Brush less motor ensures great performance and durability.** Brush less technology is the most reliable drive type used in power tools and mobile equipment providing low damage risk and maintenance cost.
- 2 **Oil lubricated pump ensures faultless** operation and great heat distribution. Thanks to this technology the device is one of the most reliable on the marketplace.
- 3 **Fully automatic on/off control switch for best performance.** It secures stability of parameters especially important when operating tools that are sensitive to changes of pressure.
- 4 **Intake filter built in to protect damage** that can be caused during transportation and storage. This special design prevents this type of damage and reduces service cost.
- 5 **Robust wheels and double front foot** for good stability. Both features ensure solid working position of the device and prevent from tipping over.

#### Associated products

R-RAWL-PN-3490 R-RAWL-PN-70  
 R-RAWL-PSC40 R-RAWL-PN-83  
 R-RAWL-PMC-38 R-RAWL-PNP-130  
 R-RAWL-PN-57 R-RAWL-PN-90  
 R-RAWL-PRN-45

### Technical Data

Product Code	Description	Tank size [l]	Lubrication	Power [HP]	Air Output [l/min]	Noise Level [dB]	Weight [kg]	EAN
R-RAWL-C50	air compressor	50	Oil lubricated	2.25	240	95	34	5906675057743

## Oil less compressor

### Features and benefits



- ✓ **Brushless motor** ensures great performance and durability. Brushless technology is the most reliable drive type used in power tools and mobile equipment providing low damage risk and maintenance cost.
- ✓ **Oil less pump ensures outstanding** performance in any working conditions. Thanks to the oil less solution the device is able to work in any place and in any position. It is also safe to transport providing lack of leaking and environmental hazard.
- ✓ **Extremely light and portable.** Low weight and compact design allows for using the device in most inaccessible areas comfortably and with providing high level of safety.
- ✓ **Quiet and efficient.** Conforms to the highest standards of noise emissions delivering clean and dry compressed air up to 8 bar.

#### Associated products

R-RAWL-PMC-38    R-RAWL-PN-83  
 R-RAWL-PN-3490    R-RAWL-PNP-130  
 R-RAWL-PN-57    R-RAWL-PSC40  
 R-RAWL-PN-70    R-RAWL-PN-90  
                          R-RAWL-PRN-45

### Technical Data

Product Code	Description	Tank size [l]	Lubrication	Power [HP]	Air Output [l/min]	Noise Level [dB]	Weight [kg]	EAN
R-RAWL-C6	oil less air compressor	6 litre	None	1.5	160	68	9	5906675034041

## Hose reel

### Features and benefits



- ✓ **Rigid steel construction** ensures that the product will withstand toughest conditions that may occur on a work site.
- ✓ **Reinforced poli-urethane hose** provides stability of parameters especially while working long distance from a compressor.
- ✓ **Hose reel construction** makes it ideal to store and transport and being very efficient on a building site.
- ✓ **Standard 3/8" quick coupling connector** provides compatibility to most of the compressed air tools one can find on the market.

#### Applications

Air supply connection between a compressor and the tool

#### Associated products

R-RALW-C6  
 R-RAWL-C24  
 R-RAWL-C50

### Technical Data

Product Code	Description	Dimensions [mm]	Hose material	Hose length [m]	Hose diameters [mm]	Quick release coupling	Weight [kg]	EAN
R-COMP-HOSEREEL	Hose reel for pneumatic tools	340 x 300 x 375	Reinforced poliurethane	30	8/12	3/8"	9	5906675270326

# RAWLPLUG NAILS



Our goal is to supply high quality products which will satisfy investors and broaden the confidence that is associated with the Rawlplug brand. We are constantly conducting technical studies and tests in order to align our products in accordance and exceeding industry and European standards. Our salt spray test ensures that a high anti corrosive protection is applied to our nails. Load bearing and pull out performance is measured with the latest apparatus in the industry. As a result of constant investment in our production facility we are expanding our business throughout the world.

## WW90CH paper collated nails for timber

### Features and benefits



- ✓ **34° angle collation with a clipped head** ensures the nail is compatible with all leading manufactures tools
- ✓ **Special coating at the base of the shank** improves the drive of the nail and ensures a secure fixing
- ✓ **Waxed paper collation** avoids deterioration in wet conditions

#### Applications

Timber frame stud work

#### Associated products

R-RAWL-WW90CH



Based on the idea of sustainable development, we are implementing innovative products of a high standard, while taking due care of the environment, society and economy. Sustainable RAWLPLUG is a company that cares for the environment and by using the latest technology created a New System of Packaging and Labels. The project was preceded by an audit of selected product groups, representing 80% of sales.

In order to develop a logical system we had to investigate in great detail the processes associated with the manufacturing, packaging, storage and transportation of our products and then adapt the dimensions to maximise the quantity of items on a pallet and storage spaces. As a result, our new packaging has contributed to reducing the amount of shipments by eliminating empty spaces in mismatched cartons or incomplete pallets.

COLOUR CODE

QR CODE FIELD
WEB/USER
GUIDE VIDEO

TECHNICAL
DRAWING

TRANSLATED
DESCRIPTIONS

TECHNICAL
DATA FIELD

CERTIFICATES
FIELD

PRODUCT
CODE FIELD

EAN
CODE
FIELD

QUANTITY
UNITS FIELD

## Technical Data

Product Code	Nail Diameter [mm]	Nail Length [mm]	Head Type	Shank Type	Nail Finish	Nail Protection	Nails per strip	Carton Quantity	Fuel cells per carton	Pallet quantity	Carton weight [kg]	EAN
R-DPK-2851	2.8	51	Clipped	Smooth	Bright	0 Microns	44	3300	3	90 cartons	8,5	5906675225616
R-DPK-2863	2.8	63	Clipped	Smooth	Bright	0 Microns	44	3300	3	90 cartons	10,4	5906675047546
R-DPK-3163	3.1	63	Clipped	Smooth	Bright	0 Microns	44	3300	3	90 cartons	11,5	5906675266749
R-DPK-2870	2.8	70	Clipped	Smooth	Bright	0 Microns	44	3300	3	90 cartons	8,5	5906675225630
R-DPK-2875	2.8	75	Clipped	Smooth	Bright	0 Microns	44	3300	3	90 cartons	8,5	5906675070957
R-DPK-3175	3.1	75	Clipped	Smooth	Bright	0 Microns	44	2200	2	90 cartons	10,1	4008940127401
R-DPK-3190	3.1	90	Clipped	Smooth	Bright	0 Microns	44	2200	2	90 cartons	12,1	5906675225654
R-DPG-2851	2.8	51	Clipped	Smooth	Silver Galvanised	Minimum 10 microns	44	3300	3	90 cartons	8,5	5906675072753
R-DPG-2875	2.8	75	Clipped	Smooth	Silver Galvanised	Minimum 10 microns	44	3300	3	90 cartons	8,5	5906675070995
R-DPG-3163	3.1	63	Clipped	Smooth	Silver Galvanised	Minimum 10 microns	44	3300	3	90 cartons	8,5	5906675070971
R-DPG-3175	3.1	75	Clipped	Smooth	Silver Galvanised	Minimum 10 microns	44	2200	2	90 cartons	8,5	5906675070940
R-DPG-3190	3.1	90	Clipped	Smooth	Silver Galvanised	Minimum 10 microns	44	2200	2	90 cartons	11,2	5906675225739
R-DRK-2851	2.8	51	Clipped	Ring	Bright	0 Microns	44	3300	3	90 cartons	8,5	5906675047539
R-DRK-2863	2.8	63	Clipped	Ring	Bright	0 Microns	44	3300	3	90 cartons	10,4	5906675049786
R-DRK-3163	3.1	63	Clipped	Ring	Bright	0 Microns	44	3300	3	90 cartons	11,5	5906675266756
R-DRK-2870	2.8	70	Clipped	Ring	Bright	0 Microns	44	3300	3	90 cartons	8,5	5906675070988
R-DRK-2875	2.8	70	Clipped	Ring	Bright	0 Microns	44	3300	3	90 cartons	8,5	5906675070964
R-DRK-3175	3.1	75	Clipped	Ring	Bright	0 Microns	44	2200	2	90 cartons	10,1	5906675038377
R-DRK-3190	3.1	90	Clipped	Ring	Bright	0 Microns	44	2200	2	90 cartons	12,1	5906675225692
R-DRG-2851	2.8	51	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	3300	3	90 cartons	8,5	5906675225746
R-DRG-2863	2.8	63	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	3300	3	90 cartons	10,4	5906675036212
R-DRG-3163	3.1	63	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	3300	3	90 cartons	11,5	5906675282657
R-DRG-2870	2.8	70	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	3300	3	90 cartons	8,5	5906675282664
R-DRG-2875	2.8	75	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	3300	3	90 cartons	8,5	5906675023397
R-DRG-3175	3.1	75	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	2200	2	90 cartons	10,1	5906675036205
R-DRG-3190	3.1	90	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	2200	2	90 cartons	12,1	5010445005367
R-DRBH-2851	2.8	51	Clipped	Ring	Bright	0 Microns	44	1100	1	120 cartons	8,5	5906675021621
R-DRBH-2863	2.8	63	Clipped	Ring	Bright	0 Microns	44	1100	1	120 cartons	10,4	5906675288765
R-DRBH-3175	3.1	75	Clipped	Ring	Bright	0 Microns	44	1100	1	120 cartons	10,1	5906675288758
R-DRBH-3190	3.1	90	Clipped	Ring	Bright	0 Microns	44	1100	1	120 cartons	12,0	5906675021614
R-DRGH-2851	2.8	51	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	1100	1	120 cartons	4,3	5906675023403
R-DRGH-2863	2.8	63	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	1100	1	120 cartons	5,2	5906675023410
R-DRGH-3163	3.1	63	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	1100	1	120 cartons	3,5	5906675289328
R-DRGH-3175	3.1	75	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	1100	1	120 cartons	5,0	5906675023427
R-DPGH-3190	3.1	90	Clipped	Smooth	Silver Galvanised	Minimum 10 microns	44	1100	1	120 cartons	5,9	5906675023434
R-DRGH-3190	3.1	90	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	1100	1	120 cartons	5,9	5906675286181
R-DRHDG-2851	2.8	51	Clipped	Ring	Hot dipped galvanised	Minimum 50 microns	44	3300	3	90 cartons	8,5	5906675047478
R-DRHDG-2863	2.8	63	Clipped	Ring	Hot dipped galvanised	Minimum 50 microns	44	3300	3	90 cartons	10,4	5906675047485
R-DRHDG-3175	3.1	75	Clipped	Ring	Hot dipped galvanised	Minimum 50 microns	44	2200	2	90 cartons	10,1	5906675047492
R-DPHDG-3190	3.1	90	Clipped	Smooth	Hot dipped galvanised	Minimum 50 microns	44	2200	2	90 cartons	12,0	5906675047461
R-DRHDG-3190	3.1	90	Clipped	Ring	Hot dipped galvanised	Minimum 50 microns	44	2200	2	90 cartons	12,0	5906675047508
R-DRS-2851	2.8	51	Clipped	Ring	Stainless Steel -A2	Full protection	44	3300	3	90 cartons	8,5	5906675023373
R-DRS-2863	2.8	63	Clipped	Ring	Stainless Steel -A2	Full protection	44	3300	3	90 cartons	10,4	5906675023380

## SC40 plastic collated pins for steel and concrete

### Features and benefits



- 1 **Ballistic point increases performance into the base material.**  
This special design is responsible for providing best load bearing values for this type of fixing.
- 2 **Plastic collation** prevents the strips from deterioration in wet weather or high humidity conditions.
- ✓ **Full round head** for a secure fixing with the highest performance achieved.



#### Applications

Cable clamps  
Cable conduits and wires  
Cable trays  
Drywall structures

#### Associated products

R-RAWL-SC40  
R-RAWL-PSC40  
R-RAWL-GP2

Our New Packaging and Label System is eco-friendly and also encompasses the 3-R philosophy Reduce, Reuse, Recycle



### Technical Data

Product Code	Nail Diameter [mm]	Nail Length [mm]	Head Type	Shank Type	Nail Finish	Nail Protection	Nails per strip	Carton Quantity	Fuel cells per carton	Carton weight [kg]	EAN
R-KSC-6/15	2.7	15	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	1	1,81	5906675210940
R-KNC-6/20	2.7	20	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	1	1,81	5906675210957
R-KNC-6/25	2.7	25	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	1	1,81	5906675210964
R-KNC-6/30	2.7	30	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	1	1,81	5906675210988
R-KNC-6/35	2.7	35	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	1	1,81	5906675265148
R-KNC-6/40	2.7	40	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	1	1,81	5906675222783

Product Code	Nail Diameter [mm]	Nail Length [mm]	Head Type	Shank Type	Nail Finish	Nail Protection	Nails per strip	Carton Quantity	Fuel cells per carton	Carton weight [kg]	EAN
SPG-R-KSC-6/15	2.7	15	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	None	1,71	5906675286013
SPG-R-KNC-6/20	2.7	20	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	None	1,71	5906675285962
SPG-R-KNC-6/25	2.7	25	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	None	1,71	5906675285979
SPG-R-KNC-6/30	2.7	30	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	None	1,71	5906675285986
SPG-R-KNC-6/35	2.7	35	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	None	1,71	5906675285993
SPG-R-KNC-6/40	2.7	40	Full Round	Smooth	Electro galvanised	Up to 4 microns	10	1000	None	1,71	5906675286006

Product Code	Description	Diameter of fixed pipes/cables [mm]	Quantity per packaging [pcs]	Weight [kg]	EAN
R-UTC-16	U type open pipe and cable clip, 16 mm	16 mm	100	0,3	5906675097510
R-UTC-20	U type open pipe and cable clip, 20 mm	20 mm	100	0,4	5906675097534
R-UTC-25	U type open pipe and cable clip, 25 mm	25 mm	100	0,45	5906675097541
R-UTC-32	U type open pipe and cable clip, 32 mm	32 mm	50	0,5	5906675097558
R-UTC-40	U type open pipe and cable clip, 40 mm	40 mm	50	0,55	5906675097565
R-PCC-18	Adjustable pipe and cable clip, 14-18 mm	14-18 mm	100	0,4	5906675097473
R-PCC-25	Adjustable pipe and cable clip, 20-25 mm	20-25 mm	50	0,45	5906675097480
R-PCC-32	Adjustable pipe and cable clip, 26-32 mm	26-32 mm	50	0,5	5906675097497
R-PCC-42	Adjustable pipe and cable clip, 33-42 mm	33-42 mm	25	0,6	5906675097503

## WW90CH, SC40, A2064, B1664 fuel cells

### Features and benefits



- ✓ **The fuel cell** is a liquified gas under pressure - colourless with a slight odour. Rawlplug fuel cells contain a high grade Propane/ Butane fuel mixture - which leaves little carbon residue in the tool.
- ✓ **The fuel** also has a fully synthetic oil as a lubricant - increasing the time between servicing.
- ✓ **Fuel cell** functions down to -5° Celsius and up to a maximum of 35° Celsius

#### Applications

Propelling gas powered tools

#### Associated products

R-RAWL-A2064  
R-RAWL-B1664  
R-RAWL-SC40  
R-RAWL-WW90CH  
R-RAWL-GMC38

### Technical Data

Product Code	Description	Fuel Type	Lubricated	Size [ml]	Weight [g]	Operating temperatures	Efficiency	EAN
R-RAWL-GP1	WW90CH fuel cell	Propane & Butane	Yes	80	40	From -5 to 35°C	min. 1100 shots	5906675274256
R-RAWL-GP1-2BL	WW90CH fuel cellx2	Propane & Butane	Yes	80	40	From -5 to 35°C	min. 1100 shots	5906675274256
R-RAWL-GP1-D	WW90CH fuel cells - display box 20pcs	Propane & Butane	Yes	80	40	From -5 to 35°C	min. 1100 shots	5906675048680
R-RAWL-GP2	SC40 fuel cell	Propane & Butane	Yes	68	34	From -5 to 35°C	min. 1000 shots	5906675022659
R-RAWL-GP3	PULSA 700 fuel cell	Propane & Butane	Yes	40	25	From -5 to 35°C	min. 1000 shots	5906675014197
R-RAWL-GP4-2BL	A2064 or B1664 fuel cell x2	Propane & Butane	Yes	30	20	From -5 to 35°C	min. 1000 shots	5906675274287

## A2064 and B1664 brad nails

### Features and benefits



- 1 **Chisel point to prevent the timber from splitting.**  
Most important while installing delicate and carefully made interior elements.
- 2 **T type head provides concealed fixing.**  
Especially important when securing unprotected timber elements.
- ✓ **Transparent glue collation** for a stain less fixing.  
Special glue collation leaves no residue in the tool or work area and most importantly prevents from damaging secured elements.

#### Applications

Tongue and groove panelling  
Dado rail  
Skirting boards  
Beading  
Architraves

#### Associated products

R-RAWL-A2064  
R-RAWL-B1664  
R-RAWL-GP4-2BL

### Technical Data

Product Code	Description [mm]	Gauge	Length [mm]	Brad Finish	Collation	Brads per strip	Carton quantity	Fuel cells per carton	Carton weight [kg]	EAN
BRADS2032	32	16 Gauge	32	Galvanised	20° glue laminated	50	2000	2	0,3	5010445004667
BRADS2038	38	16 Gauge	38	Galvanised	20° glue laminated	50	2000	2	0,3	5010445004674
BRADS2045	45	16 Gauge	45	Galvanised	20° glue laminated	50	2000	2	0,4	5010445004681
BRADS2050	50	16 Gauge	50	Galvanised	20° glue laminated	50	2000	2	0,4	5010445004698
BRADS2050SS	50	16 Gauge	50	Stainless Steel	20° glue laminated	50	2000	2	0,5	5010445004728
BRADS2064	64	16 Gauge	64	Galvanised	20° glue laminated	50	2000	2	0,5	5010445004704
BRADS1619	19	16 Gauge	19	Galvanised	0° glue laminated	50	2000	2	0,4	5010445004629
BRADS1625	25	16 Gauge	25	Galvanised	0° glue laminated	50	2000	2	0,48	5010445004636
BRADS1625SS	25	16 Gauge	25	Stainless Steel	0° glue laminated	50	2000	2	0,47	5010445005305
BRADS1632	32	16 Gauge	32	Galvanised	0° glue laminated	50	2000	2	0,57	50100445004643
BRADS1638	38	16 Gauge	38	Galvanised	0° glue laminated	50	2000	2	0,65	5010445003585
BRADS1638SS	38	16 Gauge	38	Stainless Steel	0° glue laminated	50	2000	2	0,66	5010445005312
BRADS1645	45	16 Gauge	45	Galvanised	0° glue laminated	50	2000	2	0,75	5010445004650
BRADS1650	50	16 Gauge	50	Galvanised	0° glue laminated	50	2000	2	0,82	5010445003592
BRADS1650SS	50	16 Gauge	50	Stainless Steel	0° glue laminated	50	2000	2	0,83	5010445004711
BRADS1664	64	16 Gauge	64	Galvanised	0° glue laminated	50	2000	2	1,02	5010445003608

## PN-3490 paper collated nails for timber

### Features and benefits



- 1 **The nail conforms to what is proven a market standard** which makes it first choice product even for users of competitive tools.
- 2 **Carefully developed solution** that makes our nail not only easy to drive but also extremely resistant to pull out forces.
- 3 **Nails are being used** mostly outdoors which is critical for the product to be resistant to all weather condition that may affect its performance.

#### Applications

Timber frame stud work

#### Associated products

R-RAWL-PN3490

### Technical Data

Product Code	Nail Diameter [mm]	Nail Length [mm]	Head Type	Shank Type	Nail Finish	Nail Protection	Nails per strip	Carton Quantity	Pallet Quantity	Carton weight [kg]	EAN
SPG-DPK-2851	2.8	51	Clipped	Smooth	Bright	0 Microns	44	3300	90 cartons	8,3	5906675048833
SPG-DPK-2863	2.8	63	Clipped	Smooth	Bright	0 Microns	44	3300	90 cartons	10,2	5906675048772
SPG-DPK-2875	2.8	75	Clipped	Smooth	Bright	0 Microns	44	3300	90 cartons	8,3	5906675048796
SPG-DPK-3175	3.1	75	Clipped	Smooth	Bright	0 Microns	44	2200	90 cartons	10	5906675050331
SPG-DPK-3190	3.1	90	Clipped	Smooth	Bright	0 Microns	44	2200	90 cartons	11,8	5906675023724
SPG-DPG-3190	3.1	90	Clipped	Smooth	Silver Galvanised	Minimum 10 microns	44	2200	90 cartons	11,8	5906675024639
SPG-DRK-2851	2.8	51	Clipped	Ring	Bright	0 Microns	44	3300	90 cartons	8,30	5906675048673
SPG-DRK-2863	2.8	63	Clipped	Ring	Bright	0 Microns	44	3300	90 cartons	10,2	5906675025490
SPG-DRK-2875	2.8	70	Clipped	Ring	Bright	0 Microns	44	3300	90 cartons	8,3	5906675071084
SPG-DRK-3175	3.1	75	Clipped	Ring	Bright	0 Microns	44	2200	90 cartons	10	5906675025513
SPG-DRK-3190	3.1	90	Clipped	Ring	Bright	0 Microns	44	2200	90 cartons	11,8	5906675023755
SPG-DRG-2851	2.8	51	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	3300	90 cartons	8,3	5906675023731
SPG-DRG-2863	2.8	63	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	3300	90 cartons	10,2	5906675024653
SPG-DRG-3163	3.1	63	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	3300	90 cartons	11,5	5906675048819
SPG-DRG-2875	2.8	75	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	3300	90 cartons	8,3	5906675024677
SPG-DRG-3175	3.1	75	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	2200	90 cartons	10	5906675024684
SPG-DRG-3190	3.1	90	Clipped	Ring	Silver Galvanised	Minimum 10 microns	44	2200	90 cartons	11,8	5906675023748

## GMC38 and PMC38 paper collated metal connector nails

### Features and benefits



- 1 **34° angle paper collation** ensures the nail is compatible with all leading manufactures tools
- 2 **Twisted shank** eases driving the nail into timber
- 3 **Waxed paper collation** avoids deterioration in wet conditions

#### Applications

Fixing metal timber connectors  
Truss plates  
Strapping

#### Associated products


R-RAWL-PMC-38  
R-RAWL-GMC38

### Technical Data

Product Code	Nail Diameter [mm]	Nail Length [mm]	Head Type	Head Diameter [mm]	Shank Type	Nail Finish	Collation	Carton Quantity	Pallet Quantity	Carton weight [kg]	EAN
R-DPCG-3838	3.8	38	Full Round	8.5	Twist	Galvanised	Paper collated	4000	50	10.7	5906675266732
R-HDGT-3838	3.8	38	Full Round	8.5	Twist	HDG	Paper collated	2200	100	7.7	5010445007569

## PNP-130 plastic collated nails for timber

### Features and benefits

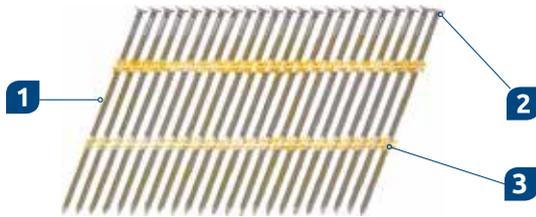

- 1 **21° degree collation** ensures the nail is compatible with all leading manufacturers tools
- 2 **Full round head** provides a secure fixing
- 3 **Plastic collation** provides protection from deterioration by weather

**Applications**  
Timber frame stud work

**Associated products**  
R-RAWL-PNP-130

### Technical Data

Product Code	Nail Diameter [mm]	Nail Length [mm]	Head Type	Head Diameter [mm]	Shank Type	Nail Finish	Collation	Carton Quantity	Pallet Quantity	Carton weight [kg]	EAN
R-GPPG-34100	3.4	100	Full Round	8.5	Ring	Galvanised	Plastic strip	2000	50	11,6	5906675267906
R-GPP-38120	3.8	120	Full Round	8.5	Ring	Bright	Plastic strip	1250	50	11,9	5906675266671
R-GPP-38130	3.8	130	Full Round	8.5	Ring	Bright	Plastic strip	1250	50	12,9	5906675266701
R-GPG-38120	3.8	120	Full Round	8.5	Smooth	Bright	Plastic strip	1250	50	11,9	5906675266688
R-GPG-38130	3.8	130	Full Round	8.5	Smooth	Bright	Plastic strip	1250	50	12,9	5906675266718
R-GPS-38120	3.8	120	Full Round	8.5	Twist	Bright	Plastic strip	1250	50	11,9	5906675266695
R-GPS-38130	3.8	130	Full Round	8.5	Twist	Bright	Plastic strip	1250	50	12,9	5906675266725

## PN-57, PN70 and PN-83 wire collated nails for timber

### Features and benefits



- 1 **16° angle collation** ensures the nail is compatible with all leading manufacturers tools
- 2 **Full round head** provides a secure fixing
- 3 **Diamond point** prevents the timber from splitting

**Applications**  
Wooden pallets and packaging  
Cladding and panelling  
Decking  
Fencing

**Associated products**  
R-RAWL-PN-57  
R-RAWL-PN-70  
R-RAWL-PN-83  
R-RAWL-PN-90

### Technical Data

Product Code	Nail Diameter [mm]	Nail Length [mm]	Head Type	Head Diameter [mm]	Shank Type	Nail Finish	Collation	Carton Quantity	Pallet Quantity	Carton weight [kg]	EAN
R-GDP-2132	2.1	32	Full round	6.1	Ring	Bright	Wire welded	16800	30 Cartons	15,50	5906675025452
R-GDP-2138	2.1	38	Full round	6.1	Ring	Bright	Wire welded	12600	30 Cartons	13,30	5906675266619
R-GDP-2155	2.1	55	Full round	6.1	Ring	Bright	Wire welded	10500	30 Cartons	15,70	5906675266626
R-GDP-2555	2.5	55	Full round	6.1	Ring	Bright	Wire welded	9000	30 Cartons	20,00	5906675266633
R-GDP-2560	2.5	60	Full round	6.1	Ring	Bright	Wire welded	7200	30 Cartons	17,20	5906675266640
R-GDP-2570	2.5	70	Full round	6.1	Ring	Bright	Wire welded	7200	30 Cartons	19,40	5906675266657
R-GDP-2880	2.8	80	Full round	7.5	Ring	Bright	Wire welded	4500	30 Cartons	13,90	5906675266664



## RAWLPLUG PROFESSIONAL STAPLERS




Designed specifically for industrial applications, the Rawlplug professional hand stapling tool offers a solution for securing foils, linings and breather membranes.

Heavy duty stapling is possible due to the metal body construction. The easy grip handle is ergonomic and intended for one handed operation.

Rawlplug staples are manufactured to the highest standards and are subjected to regular testing to ensure their strength and rust protection

## Heavy duty hammer tacker

### Features and benefits



- 1 **Loading magazine with lock**  
easy access staple insertion
- 2 **Steel housing**  
resists mechanical damage
- 3 **Staple window**  
easy view if stapler is loaded
- 4 **Type, range**  
staples 6-10 mm

### Technical Data

Product Code	Dimensions [mm]	Fastener type	Staples range [mm]	Magazine capacity [pcs]	Noise level [dB]	Weight [kg]	EAN
RT-KGR0011	150 x 35 x 320	Staples	6-10	70	86.7	0.71	5391512821494

## Professional hand stapler

### Features and benefits



- 1 **3in1 operates with staples or pins**  
Reducing the need for two types of tool
- 2 **Retractable handle**  
for easier transport and storage
- 3 **Two component handle**  
prevents accidents
- 4 **Power adjustment**  
possible to adjust to various materials
- 5 **Steel housing**  
resists mechanical damage
- 6 **Bottom loading magazine with lock**  
easy access staple insertion
- 7 **Staple window**  
easy view if stapler is loaded
- 8 **Type, range**  
staples 6-14 mm, nails 14 mm, pins 14 mm

### Technical Data

Product Code	Dimensions [mm]	Fastener type	Staples range [mm]	Magazine capacity [pcs]	Noise level [dB]	Weight [kg]	EAN
RT-KGR0024	188 x 31 x 110	Staples, Brads, Pins	6-14	90	86.6	0.7	5391512826123

Product Code	Description	Staple crown [mm]	Staple gauge [mm]	Thicknes [mm]	Weight [kg]	EAN
RT-KSS140065040	Staple RL140 6 mm box 5040 pcs	10,5	6	1,2	0.54	5391512826130
RT-KSS140085040	Staple RL140 8 mm box 5040 pcs	10,5	8	1,2	0.63	5391512821654
RT-KSS140105040	Staple RL140 10 mm box 5040 pcs	10,5	10	1,2	0.75	5391512821661
RT-KSS140125040	Staple RL140 12 mm box 5040 pcs	10,5	12	1,2	0.85	5391512821678
RT-KSS140145040	Staple RL140 14 mm box 5040 pcs	10,5	14	1,2	0.96	5391512826147



## RAWLPLUG REBAR TIER



The Rawlplug rebar tier is an effective alternative to manual wire binding, which is traditionally a monotonous and stressful task. The ergonomic rebar tier not only improves working conditions, it is also an economic and reliable solution, which helps to solve tasks far more effectively.

## Rebar tying

### Features and benefits




- ✓ **Increases job efficiency** by reducing tying time. Labour cost is one of the most crucial factors in construction industry. Rawlplug rebar tier allows to minimize the cost related to reinforcing concrete by reducing time needed to make steel structures. Skilled operator can do up to 25 000 ties per day!
- ✓ **Reduces risk of health problems** Thanks to carefully designed and balanced construction the tool has no influence on operators fatigue.
- ✓ **Brushless motor ensures great performance and durability.** Brushless technology is the most reliable drive type used in power tools and mobile equipment providing low damage risk and maintenance cost. In addition to Li-Ion battery packs it provides end user with great combination to achieve best performance standards.

#### Applications

Tying reinforcing rebar structures

#### Associated products

R-RAWL-RB3908



### Technical Data

Product Code	Re-bar range [mm]	Tie wire size [mm]	Dimensions [mm]	Wire consumption [mm]	Tying time [s]	Ties per coil	Ties per charge	Weight [kg]	EAN
R-RAWL-RB39	12 - 40	0.8	300 x 280 x 100	600/780	0.9	up to 150	up to 3000	2.6	5906675057750



### Technical Data

Product Code	Wire diameter [mm]	Spool length [m]	Wire type	Weight [kg]	EAN
R-RAWL-RB3908	0,8	95	Soft	0.2	5906675057767

## First fix package - Basic A / Basic B

Start-up package for professional roofing distributors. Created with focus on most versatile and universal tool and consumables dedicated for first fix applications.



### Basic A

PLACE	PRODUCT CODE	PCS.	UNIT
H1	R-RAWL-WW90CH	1	Dedicated
S1-1	R-KIT-WW90/SC40	4	B bag
S1-2	R-DRGH-3190	8	Handypack
S2-1	R-DRK-2851	4	NFP
S2-2	R-DRG-2863	4	NFP
S3-1	R-DRG-2870	4	NFP
S3-2	R-DRG-3175	4	NFP
S4-1	R-DRG-3190	4	NFP
S4-2	R-DPK-3190	4	NFP

### Basic B

PLACE	PRODUCT CODE	PCS.	UNIT
H1	R-RAWL-WW90CH	1	Dedicated
S1	R-DRG-2863	8	NFP
S2	R-DRG-3175	8	NFP
S3	R-DPK-3190	8	NFP
S4	R-DRG-3190	8	NFP

## Installation fitting package - Basic A / Basic B

Basic version of installation stand for professional distributors. Stand contains tool and start-up package of consumables for electrical, plumbing and drywall structures contractors. Package is based on a gas powered tool which is the most popular and renowned technology in construction industry. Perfect choice for professionals.



### Basic A

PLACE	PRODUCT CODE	PCS.	UNIT
H1	R-RAWL-SC40	1	Dedicated
S1-1	R-KIT-WW90/SC40	4	B bag
S1-2	R-KSC-6/15	8	OJ-R-186-140-108
S2	R-KNC-6/20	12	OJ-R-186-140-108
S3	R-KNC-6/25	12	OJ-R-186-140-108
S3-1	R-KNC-6/30	6	OJ-R-186-140-108
S3-2	R-KNC-6/35	6	OJ-R-186-140-108
S3-3	R-KNC-6/40	6	OJ-R-186-140-108

### Basic B

PLACE	PRODUCT CODE	PCS.	UNIT
H1	R-RAWL-SC40	1	Dedicated
S1	R-KSC-6/15	10	OJ-R-186-140-108
S2	R-KNC-6/20	12	OJ-R-186-140-108
S3	R-KNC-6/25	12	OJ-R-186-140-108
S4	R-KNC-6/30	12	OJ-R-186-140-108

## Installation fitting package - Basic C

Basic version of installation stand for professional distributors. Stand contains tool and start-up package of consumables for electrical, plumbing and drywall structures contractors. Biggest advantage of this option is pneumatic based solution which allows to reduce consumables and maintenance cost.



PLACE	PRODUCT CODE	PCS.	UNIT
H1	R-RAWL-PSC40	1	Dedicated
S1	SPG-R-KSC-6/15	11	OJ-R-186-140-108
S2	SPG-R-KNC-6/20	12	OJ-R-186-140-108
S3	SPG-R-KNC-6/25	12	OJ-R-186-140-108
S4	SPG-R-KNC-6/30	6	OJ-R-186-140-108
S4	SPG-R-KNC-6/35	6	OJ-R-186-140-108
S4	SPG-R-KNC-6/40	6	OJ-R-186-140-108


## POS elements



POS ELEMENT	PRODUCT CODE
SMALL STAND	MZR-05N-SP

## Professional roofing package - first and second fix

Complementary replenishment of first fix and second fix nails and brads. Designed for retail customers supplying roofing and second fix contractors. The offer contains review of professional tools and consumables for securing various materials into timber.

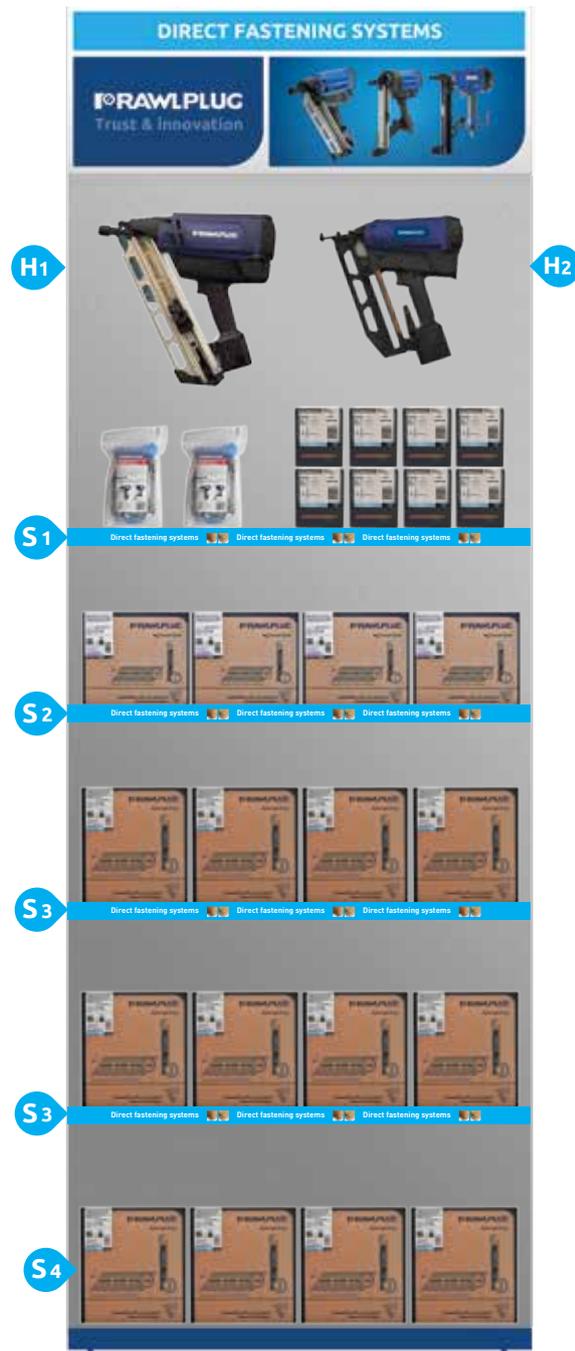

PLACE	PRODUCT CODE	PCS.	UNIT
H1	R-RAWL-WW90CH	1	Dedicated
H2	R-RAWL-A2064	1	Dedicated
S1-1	R-KIT-WW90/SC40	4	B bag
S1-2	R-KIT-WW90/SC40	4	B bag
S1-3	BRADS2032	4	Bradpack
S1-4	BRADS2038	4	Bradpack
S1-5	BRADS2050	4	Bradpack
S2-1	R-DRGH-2851	4	Handypack
S2-2	R-DRGH-2863	4	Handypack
S2-3	R-DRGH-3175	4	Handypack
S2-4	R-DRGH-3190	4	Handypack
S3-1	R-DPK-2851	2	NFP
S3-2	R-DPK-2863	2	NFP
S3-3	R-DPK-3175	2	NFP
S3-4	R-DPK-3190	2	NFP
S4-1	R-DRG-2851	2	NFP
S4-2	R-DRG-2875	2	NFP
S4-3	R-DRG-3163	2	NFP
S4-4	R-DRG-3190	2	NFP

## Installation fitting package - Max

Maximum version of the most popular replenishment for installation industry. Offer dedicated for professional distributors supplying contractors in plumbing, electrical and drywall areas of construction industry.



PLACE	PRODUCT CODE	PCS	UNIT
H1-1	R-RAWL-SC40	1	Dedicated
H1-2	R-UTC-16	4	OFRL-145-290-N
H2-2	R-UTC-25	4	OFRL-145-290-N
S1-1	R-KIT-WW90/SC40	4	OJ-R-186-140-108
S1-2	R-KIT-WW90/SC40	4	OJ-R-186-140-108
S1-3	R-KSC-6/15	4	OJ-R-186-140-108
S1-4	R-KSC-6/15	4	OJ-R-186-140-108
S1-5	R-KSC-6/15	4	OJ-R-186-140-108
S2-1	R-KNC-6/20	4	OJ-R-186-140-108
S2-2	R-KNC-6/20	4	OJ-R-186-140-108
S2-3	R-KNC-6/20	4	OJ-R-186-140-108
S2-4	R-KNC-6/20	4	OJ-R-186-140-108
S2-5	R-KNC-6/20	4	OJ-R-186-140-108
S2-6	R-KNC-6/20	4	OJ-R-186-140-108
S3-1	R-KNC-6/25	4	OJ-R-186-140-108
S3-2	R-KNC-6/25	4	OJ-R-186-140-108
S3-3	R-KNC-6/25	4	OJ-R-186-140-108
S3-4	R-KNC-6/30	4	OJ-R-186-140-108
S3-5	R-KNC-6/30	4	OJ-R-186-140-108
S3-6	R-KNC-6/30	4	OJ-R-186-140-108
S4-1	R-KNC-6/35	4	OJ-R-186-140-108
S4-2	R-KNC-6/35	4	OJ-R-186-140-108
S4-3	R-KNC-6/35	4	OJ-R-186-140-108
S4-4	R-KNC-6/40	4	OJ-R-186-140-108
S4-5	R-KNC-6/40	4	OJ-R-186-140-108
S4-6	R-KNC-6/40	4	OJ-R-186-140-108

## POS elements



POS ELEMENT	PRODUCT CODE
LARGE STAND	MZR-43-SP
SHELF	MZR-44-SP
HOOK	MZR-50-SP
SMALL STAND	MZR-05N-SP

# More from Rawlplug

## Efficacy in the hardest conditions

We are proud to present innovative fixing from the **Bonded Anchors and Mechanical Anchors** group designed for the heavy loads demanded by industrial construction. Among our products you will find unique solutions to enable you to achieve maximal amounts with any kind of substrate. Knowledge backed-up with experience guarantees the effectiveness of our fixings and the success of your investment.

## Durability and versatility

Our wide range of expansion plugs made of synthetic materials and metal, for low and medium loads, have been used for years for both industrial and residential construction. Incredibly durable FF1 from frame fixings group, universal in use 4ALL and UNO Plug, no. 1 on the UK market, are leading products of RAWLPLUG®'s offer in the field of **Lightweight Fixings**, designed with every substrate in mind.

## Innovations in Energy Saving construction

As a leading producer of façade insulation fixings we would like to present to you our wide array of products used in energy saving constructions. The Reliability and simplicity of our solutions combined with their ease of installation make them the most popular and desired by professionals. We invite you to familiarize yourselves with our offer for **Façade Insulations Fixings**.

## Excellent resistance for high loads

Thanks to our close cooperation with roof covering product producers, and our insight into the needs of investment contractors, our **Roofing Insulations Fixings** are one of the most popular among European roof fixing system producers. We invite cooperation from engineers, architects, and roof works contractors. And encourage you to try out our calculation software "ROOFIX" today.

## Safety Certificate

Stepping towards the needs of customers, and increasing the general level of safety in closed spaces, we have created a protection system event of which in the combustion prevents fire and smoke from spreading. We invite you to acquaint with our offer for **Passive Fire Protection Systems**, which hold the European Conformity Assessment.

## Guarantee of lasting quality

Thanks to our constant monitoring of the production of assortments from our **Sealants and Adhesives** range we guarantee the constant and repeatable quality of our products. Their wide range of application possibilities and high efficiency has enabled us to rank among the top 5 of companies in the construction chemistry industry for years.

## Maximal weather resistance

Rawlplug® **Fasteners** guarantee reliability of connections and maximal weather resistance. Our products, thanks to the use of appropriate materials and adoption of modern anticorrosion coating, pass even the hardest tests, matching the expectations of the most demanding clients. In our rich offer of screws characterized by extraordinary ease of installation, one may find perfect kind of connection for any kind of material and substrate.

## Save time and minimize costs

In our offer of **Direct Fastening Systems** you may find, among others, highly effective pneumatically and gas powered nailers with accessories, compressors and an innovative and ergonomic rebar tier. We invite you to familiarize yourselves with the capabilities of Rawlplug® tools, which can significantly increase the comfort and effectiveness of work at any construction site.

## Maximal effect of optimal offer

In order to ease the application and proper use and installation of our products, we supplement the our assortment of fixings with a precisely composed offer of **Power Tool Accessories**. They include, among others, European-made drills of the highest quality, as confirmed with a Sichersafe certificate. We invite you to familiarize yourselves with our offer of accessories for professional installation techniques of the Rawlplug® brand.

## Unique and exclusive exposition

Rawlplug **POS Essential Offer** it is a unique and complete solution designed for product exposition in building wholesale and retail stores. The POS system is based on easily configurable rack components enhanced with expansive information elements and additional decorations, as well as a combination of individual packages in form of innovative Rawlplug Bag and cutting-edge cardboard boxes.



**RAWLPLUG®**

Trust & Innovation. Since 1919.



## GREAT BRITAIN

### Rawlplug Ltd

Skibo Drive  
Thornliebank Industrial Estate  
Glasgow G46 8JR

Tel: + 44 (0) 1 41 6387 961

Fax: + 44 (0) 1 41 6387 397

Email: [rawlinfo@rawlplug.co.uk](mailto:rawlinfo@rawlplug.co.uk)

Technical Advisory Service:

[rawltech@rawlplug.co.uk](mailto:rawltech@rawlplug.co.uk)

Web: [www.rawlplug.co.uk](http://www.rawlplug.co.uk)

## POLAND

### Rawlplug SA

ul. Kwidzyńska 6  
51-416 Wrocław  
Tel: + 48 (71) 3209 100  
Fax: + 48 (71) 3726 111  
Email: [info@rawlplug.com](mailto:info@rawlplug.com)  
Web: [www.rawlplug.com](http://www.rawlplug.com)

## GERMANY

### Koelner Deutschland GmbH

Lutherstr. 54  
73614 Schorndorf  
Tel: + 49 (0) 7181 9777 2-0  
Fax: + 49 (0) 7181 9777 2-22  
Email: [info@koelner-befestigung.de](mailto:info@koelner-befestigung.de)  
[info@rawlplug.de](mailto:info@rawlplug.de)  
Web: [www.rawlplug.de](http://www.rawlplug.de)

## FRANCE

### RAWL France

ZI Mitry-Compans  
12-14 Rue Marc Seguin  
77290 Mitry-Mory  
Tel: + 33 (0) 1 6021 5020  
Fax: + 33 (0) 1 6467 1984  
Email: [rawl@rawl.fr](mailto:rawl@rawl.fr)  
Web: [www.rawl.fr](http://www.rawl.fr)

## IRELAND

### Rawlplug Ireland Ltd

Unit: 10 Donore Business Park  
Donore Road Drogheda  
Co Louth  
Tel: + 353 (0) 41 9844 338  
Fax: + 353 (0) 41 9802 874  
Email: [sales@rawlplug.ie](mailto:sales@rawlplug.ie)  
Web: [www.rawlplug.ie](http://www.rawlplug.ie)

## SWEDEN

### Rawl Scandinavia AB

Baumansgatan 4  
593 32 Västervik  
Tel: + 46 (0) 4903 0660  
Fax: + 46 (0) 4903 0670  
Email: [info@rawlplug.se](mailto:info@rawlplug.se)  
Web: [www.rawlplug.se](http://www.rawlplug.se)

## CZECH REPUBLIC

### Koelner CZ s.r.o

Komerční Park Tulipan  
Palackého 1154/76A (hala T3)  
702 00 Ostrava-Privoz  
Tel: + 420 (596) 6363 97  
Fax: + 420 (596) 6363 98  
Email: [info@koelner.cz](mailto:info@koelner.cz)  
Web: [www.koelner.cz](http://www.koelner.cz)

## SLOVAKIA

### Koelner Slovakia, s.r.o.

Dlhá 95  
010 09 Žilina  
Tel/Fax: + 421 (41) 5003 900  
Mob. Purchase Order:  
+ 421 948 704 901  
Email Purchase Order:  
[objednavky@koelnersk.sk](mailto:objednavky@koelnersk.sk)  
Email: [info@koelnersk.sk](mailto:info@koelnersk.sk)  
Web: [www.koelnersk.sk](http://www.koelnersk.sk)

## HUNGARY

### Koelner Hungária Kft.

Jedlik Ányos u. 34  
2330 Dunaharaszti  
Tel: + 36 (24) 5204 00  
Fax: + 36 (24) 5204 01  
Email: [info@koelner.hu](mailto:info@koelner.hu)  
Web: [www.koelner.hu](http://www.koelner.hu)

## RUSSIA

### OOO Koelner Trading KLD

ul. 4-ya Bolshaya Okruzhnaya 1A  
236009 Kaliningrad  
Tel: + 7 (4012) 5738 34  
+ 7 (4012) 5738 36  
Fax: + 7 (4012) 5738 80  
Email: [koelnerkld@mail.ru](mailto:koelnerkld@mail.ru)  
Web: [www.koelner-trading.ru](http://www.koelner-trading.ru)

## UKRAINE

### Koelner Ukraine

vul. Naukova 3a  
79060 Lviv  
Tel: + 380 (32) 2440 744  
Email: [koelner@koelner.ua](mailto:koelner@koelner.ua)  
Web: [www.koelner.ua](http://www.koelner.ua)

## LITHUANIA

### UAB Koelner Vilnius

Zarijų g. 2  
LT-02300, Vilnius  
Tel: + 370 (5) 2324 862  
Fax: + 370 (5) 2324 933  
Email: [koelner@koelner.lt](mailto:koelner@koelner.lt)  
Web: [www.koelner.lt](http://www.koelner.lt)

## UNITED ARAB EMIRATES

### Koelner-Rawlplug Middle East FZE

P.O. Box 261024  
Jebel Ali Free Zone, Dubai  
Tel: + 971 (4) 8839 501  
Fax: + 971 (4) 8839 502  
Email: [dubai@rawlplug.co.uk](mailto:dubai@rawlplug.co.uk)  
Web: [www.rawlplug.ae](http://www.rawlplug.ae)